


innex C831

Panoramic Conference Camera




Quick Start Guide

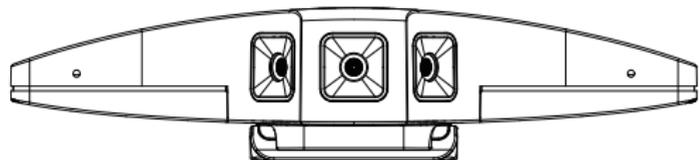

Scan for Multi-language Guide.
Kurzanleitung auf Deutsch scannen.
Guía rápida de escaneo en español
Scanner le guide rapide en français
Scansiona la guida rapida in italiano.
Zeskanuj skróconą instrukcję w języku polskim.
Skanna den svenska snabbstartsguiden.
Scannen voor de Nederlandse snelstartgids
日本語のクイックガイドを入手。

Package Contents




Device




USB Cable



Safety, Compliance
and Warranty




Warranty Card



Quick Start Guide



Wall Bracket



Wall anchors x2

Wall Mount kit




Self-tapping Screw X2
(L30mm/1.18")




Thumb Screw
(1/4-20-L8mm/0.31")

Camera Overview

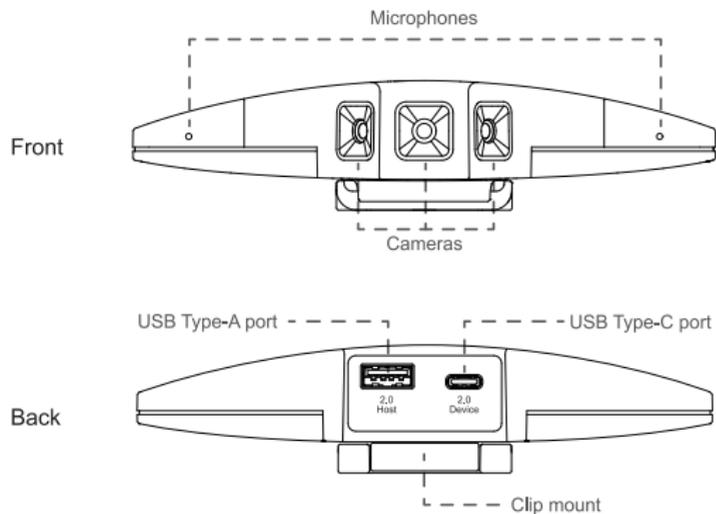

(1) USB-C port: For connecting the USB-C end of the bundled USB cable which should then be connected to a USB-A port of a laptop or desktop PC. This connection will provide power to the camera and transmit both video and audio from the camera to the computer.

(2) USB-A port: For connecting to a USB-A cable which connects to another USB device such as a keyboard or mouse.

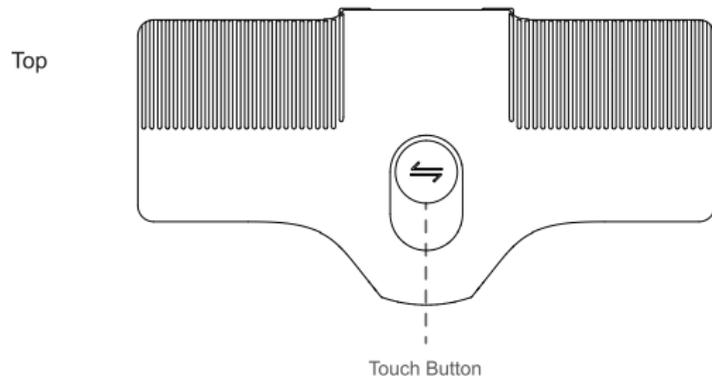

(1) Short tap the touch button to cycle through view angles: 180°, 150°, 120°, 90°, and 75°.

(2) Long press the touch button when the view angle is set to less than 180°, activating the ePan function. This allows the view to move left and right.

(3) You can also activate Memory mode by pressing and holding the touch button for 6-10 seconds when the view angle is set to 180°. Once activated, the status will be displayed on the screen. Tap the button again to deactivate the mode.

When Memory mode is on, the camera remembers the last field of view (FoV) and starts with that FoV the next time. When the mode is off, the camera defaults to a 180° view.

Setup and Installation

Operating System

Windows 10 or above. MacOS 10.15 or above.

Connecting Camera

- (1) Connect the USB-C end of the bundled cable to the camera and the other end to a laptop or desktop.
- (2) Connect the USB-A end of the same cable to a laptop or desktop PC.




Ensure to use the bundled cable and connect it directly to a USB 3.0 port. Connecting it to a USB 2.0 port or via a USB hub may cause malfunction due to insufficient power supplied to the camera.

Mounting Camera


Clip Mount:

Easily mount onto any display such as laptop, monitor, television, or interactive display using the built-in clip mount.

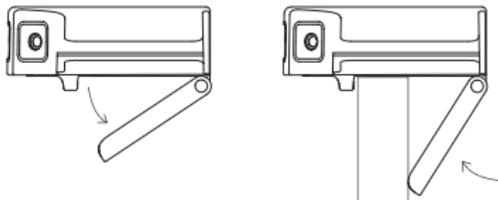


Tripod Mount:

Tripod screw holes are located at the bottom of the clip mount for tripod mounting.

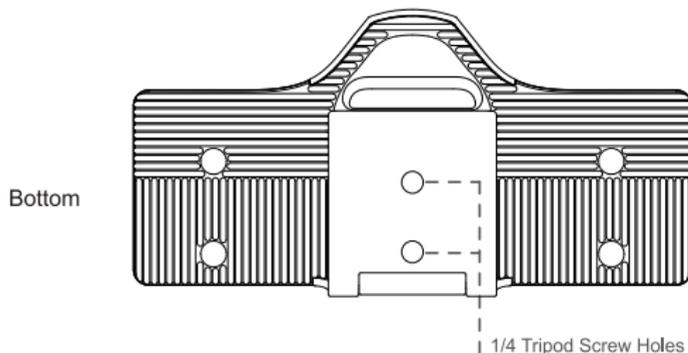


Wall Mount:

(1) Drill two 6mm/0.24" diameter holes that are 28mm/1.1" apart from the center horizontally on the wall. Insert two wall anchors into the holes.

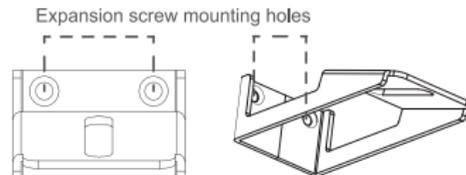

(2) Screw the wall bracket tightly against the wall using two self-tapping screws.

(3) Position the camera's tripod 1/4" hole onto the wall bracket's opening and turn the thumb screw into it. Continue turning until the camera is securely mounted onto the wall bracket.

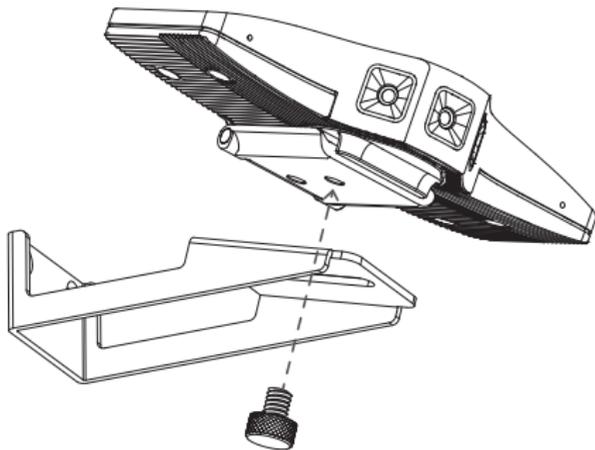

Innex Studio

To unlock all features of C831, such as auto-layout by AI, image quality settings and firmware update, please go to <https://funtechinnovation.com/downloads/>, find Innex C831 and download camera software: Innex Studio.

For more detail about the software, go to <https://funtechinnovation.com/software/innex-studio/>

For any product related question please visit www.funtechinnovation.com/faq

Specifications

Camera

Max. Output Resolution & Frame Rate	H264@30fps: 1280*720 MJPG@30fps: 380*2160 (4K) YUY2@30fps: 640*480
Video Compression	MJPG/H.264/YUY2
Focus	Fixed focus
Viewing Angle	Diagonal: 180° / Horizontal: 170° / Vertical:90°
AI video modes	By Software: Multiple face tracking capability applicable in 6 different modes: Overview Grid, Manual, Auto-framing, Grid, Whiteboard Studio, and Speaker.
Manual modes	Short tap: View angle switch (180° 150°, 120°, 90°, and 75°) Long press: E-pan
Other feature	3DNR

Microphone

Built-in Microphone	Dual Omnidirectional Microphone
Sensitivity	-26dBFS
Sampling rate	16KHz
Frequency response	100Hz-13KHz
Automatic Gain Control	Yes
Noise Reduction	Yes
Pickup range	Effective: 0-4m/13ft Maximum: 8m/26ft

Others

Interface	USB Type C to Type A 2.0
Powered By	USB 3.0 or above
Protocol	UVC; UAC; Plug-and-play
Operating System	Innex C831 Windows 7, 10, 11 Mac OS X 10.15 or above Innex Studio Windows 7, 10, 11 Mac OS X 10.15 or above Intel 4th Generation i5 or above MacBook Pro(2013) or above
Product Dimensions	5.7x1.3x2.9"/146x33x74mm
Net Weight	240g/ 8.47 oz
Package Contents	Innex C831, USB Cable, Wall Mount (including screws and wall anchors), Quick guide, Safety information Warranty card

Safety Information

Federal Communications Commission (FCC) Statement. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter. For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.



APEX CE SPECIALISTS LIMITED
89 PRINCESS STREET, MANCHESTER, M1 4HT, UK



APEX CE SPECIALISTS GMBH
HABICHTWEG 1 41468 NEUSS GERMANY



Vous êtes responsable de remettre tous les appareils électriques et électroniques usagés à des points de collecte correspondants.

Pour en savoir plus:
www.quefairedesdechets.fr

FR