



innex Connect Pro+

Seamless. Effortless. Wireless.
Redefine the Way You Present



4K Screen
Share



FHD Camera
Streaming



Plug & Play



Touchback
Control



Multi-Device
Sharing



Multi-Screen
Sharing



Data
Security

Upgrades Your Display

Enhance your display with camera integration, touchback control, and versatile screen sharing from laptops, tablets, or phones using the Connect Pro Button, Connect Pro software, or native methods like AirPlay, Miracast, and Chromecast.



Boosts Meeting Efficiency

The Innex Connect Pro+ is a plug-and-play wireless conferencing system. Just one click to wirelessly connect your laptop to the room's display, camera, and audio—no cable, no hassle.




Multiple ways to cast wirelessly

Share your screen instantly with the Connect Pro Button, or use native casting options like AirPlay, Miracast, and Chromecast.



Two ways to stream camera wirelessly

Connect your camera, then either click the Connect Pro Button or launch the Connect Pro Software to start streaming.

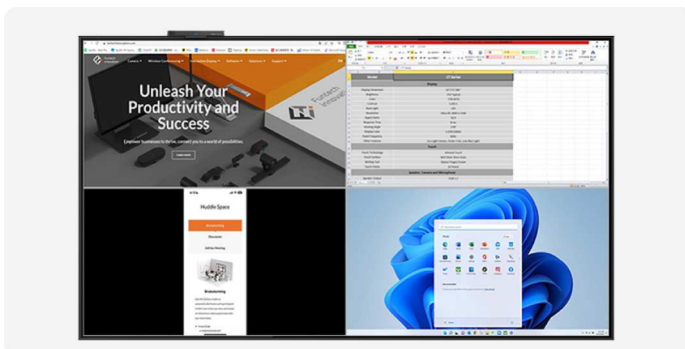

Multi-screen Sharing

Turns any space into a meeting hub with wireless conferencing and multi-screen casting for an enhanced experience.



Touchback Control

Connect the touchscreen to the Connect Pro Receiver via USB A-B. Once connected, any interaction on the touchscreen will be applied simultaneously to your laptop.

Connect Pro Software – Meetings Made Easy

The Connect Pro Software enables wireless screen casting, audio transmission, and BYOM functionality, with flexible sharing modes. Making it ideal for large-scale enterprise deployment with its intuitive interface and easy management.



Ultimate Wireless BYOM Solution

The Innex Connect Pro+ supports BYOM, allowing users to host meetings on their preferred platforms directly from their laptops. Just connect your device for seamless integration with the conference camera, audio, and touchback control.



Works with any Meeting Platforms



Secure & Reliable Sharing



Smarter Design, Better Experience



Plug and Play

Simply plug the Connect Pro Button into your laptop to share your screen instantly with one click.



Power up without compromise

The Connect Pro Button includes a built-in USB-C port that allows power pass-through to your laptop without occupying the laptop's port.

Transform your Display into a Meeting Hub

The Innex Connect Pro+ transforms any touch display into an all-in-one meeting solution with simple HDMI and USB connections for cameras, touchback control, and peripherals. Compact, powerful, and easy to install.



Peripheral Device Support



Clutter-Free Conference Space

Unlike traditional setups with complex and messy cabling, the Innex Connect Pro+ simplifies meetings with a single USB connection, eliminating cable clutter.



Innex Connect Pro+



Traditional

innex Connect Pro+ SPECS

Model		Connect Pro+
Transmission Distance		10m
Screen Share Options		Connect Pro Button, Airplay, Miracast, Chromecast, Connect Pro Software
Screen Share Resolution	Connect Pro Button	3840x2160 @30Hz; 1920x1080 @60Hz
	Airplay	Up to 1920x1080 @60Hz (Depends on network conditions)
	Miracast	1920x1080 @30Hz
	Chromecast	Up to 1920x1080 @30Hz (Depends on network conditions)
	Connect Pro Software	Up to 3840x2160 @30Hz (Depends on network conditions)
BYOM Camera Resolution	Connect Pro Button	1920x1080, 1280x720
	Connect Pro Software	Up to 1920x1080 (Depends on network conditions)
System Requirements	Connect Pro Button	Windows 11 or later (Intel Core), MacOS – latest version recommended
	Airplay	iOS / Mac Os – latest version recommended
	Chromecast	Google Cast compatible ; Chromecast built-in compatible Supported OS / Apps: Android 7.0 or later, iOS 14.0 or later, Windows 10 or later, macOS 11 or later, latest version ChromeOS, latest version of Chrome browser
	Miracast	Windows 11 or later (with Miracast-capable GPU and drivers), Android 4.2 or later (device dependent)
	Connect Pro Software	Windows 11 or later. CPU: Intel Core i5 or higher
Network	Network Latency	< 10ms
	Connect Pro Button Requirement	Wi-Fi supported channels 2.4GHz (1-13), 5GHz (36, 40, 44, 48, 52, 56, 60, 64, 149, 153, 157, 161, 165)
	Security	Supports WPA2-PSK authentication and 128-bit AES encryption
Receiver	Wi-Fi	2.4GHz/5GHz, IEEE 802.11 a/b/g/n/ac
	I/O Ports	USB-A 2.0 x3 USB-C (for pairing) x1 HDMI Out x1 DC In x1
	Power	12V 1.5A
Button	I/O Ports	USB-C (male) x1 USB-C (female) x1 (for power pass through: PD3.0)
	Power	5V 500mA
	USB Interface Requirements	USB-C with DP Alt Mode support
Storage Temperature		-10 °C (14°F) - 60 °C(140°F)
Operation Temperature		0 °C (32°F) - 40 °C(104°F)
Storage Humidity		≤80%
Operation Humidity		≤80%
Package Contents		Connect Pro+ Receiver, Connect Pro Button x2, 3m/9.8ft Power adapter with multi-country plug set, Wall mount kit, Cable organizer x2, Quick start guide, Warranty card, Safety document